



AALBORG UNIVERSITY
DENMARK

Aalborg Universitet

Mass threshold for 'harmless' drones

La Cour-Harbo, Anders

Published in:
International Journal of Micro Air Vehicles

Publication date:
2017

Document Version
Submitted manuscript

[Link to publication from Aalborg University](#)

Citation for published version (APA):
la Cour-Harbo, A. (2017). Mass threshold for 'harmless' drones. International Journal of Micro Air Vehicles.

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- ? Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- ? You may not further distribute the material or use it for any profit-making activity or commercial gain
- ? You may freely distribute the URL identifying the publication in the public portal ?

Take down policy

If you believe that this document breaches copyright please contact us at vbn@aub.aau.dk providing details, and we will remove access to the work immediately and investigate your claim.

Mass threshold for 'harmless' drones

International Journal of Micro Air Vehicles
XX(X):1-13
©The Author(s) 2015
Reprints and permission:
sagepub.co.uk/journalsPermissions.nav
DOI: 10.1177/ToBeAssigned
www.sagepub.com/



Anders la Cour-Harbo¹

Abstract

Today it is possible to buy small and cheap drones in toy stores, super markets, and on numerous online shops. Often, these drones are very light-weight and are flown in back yards, sport fields, parking lots, and such places. They typically pose no lethal threat to people in the vicinity of the drone. Nonetheless, in many countries such drones are regulated by aviation rules that does not (sufficiently well) distinguish between these drones and the larger hobby or professional drones. Consequently such small drones are flown illegally. This has prompted some national aviation authorities to consider a form of 'harmless' category, which ideally should be based on a mass threshold. To aid such a classification this work proposes a mass threshold of 250 gram, below which, we argue, it is reasonable to classify drones as 'harmless' in the sense that the expected fatality rate is equivalent to that of manned aviation.

In this work we combine a series of models and methods to provide a foundation for giving a mass threshold. The approach is probabilistic and focuses on the relation between mass and human injury in the case of small drones. The approach is also parameterized such that readers can substitute other probabilities and conduct their own calculations, possibly determining a different mass threshold.

Keywords

Drone, unmanned aircraft, threshold, UAS category, harmless

Introduction

Introducing new legislation for unmanned aircraft is a worldwide challenge that national aviation authorities in most countries find difficult and time-consuming. This comparatively new area within aviation is in many aspects different from manned aviation, and therefore requires new regulation. One such difference is the size and weight of the aircraft; once unmanned an aircraft can become arbitrarily small. As a consequence it makes sense to divide the unmanned aircraft into size categories and impose less stringent requirements on comparatively smaller categories. One interesting category is the 'no harm' size, which is loosely defined as aircraft that cannot do harm to people through physical interaction (except intentionally through chemicals, explosives, and other such means). For aircraft of this size it would not be necessary to consider the safety measures that otherwise apply to drones, making them much easier to manufacture and operate as well as making the regulation easier to enforce. This work investigates what would be a proper criteria for a 'harmless' category.

Since this work is addressing specifically the very small unmanned aircraft that popularly are called 'drones' this term is also prevailing in this work. Most of the referred literature would use UAS (unmanned aircraft system) or RPAS (remotely piloted aircraft system), a subset of UAS. Some literature also use now obsolete UAV (unmanned aerial vehicle).

Background

This work was prompted by growing desire from national and international regulators to have a mass threshold below

which it would be reasonable to significantly relax regulatory restrictions without compromising public safety. That is, a 'no harm' threshold in the sense that drones below this mass in all probability would not cause severe or fatal injuries under any circumstances.

It seems justified that such a threshold do exist; large drones obviously can be lethal on impact, while tiny drones (say, less than 1 gram) does not pose any direct threat to human safety. The challenge is to find a threshold where we pass from the latter situation to the former.

The fast development in miniaturization and low-cost manufacturing of simple consumer electronics means that drones are now available to everybody through toy vendors, super markets, 'add to basket' web sites, etc. The national aviation regulations are typically not updated at the same fast pace and consequently, when people operate very small toy drones in their back yards they might inadvertently violate regulations even though the drone probably could be categorized as 'harmless'. Being unable to – and generally not interested in – limiting this widespread use of toy drones civil aviation authorities might introduce the 'harmless' category to legalize at least the smaller of these aircraft.

Recognizing that although a limit on the mass of a drone is very easy to enforce (in the sense that determining the mass of a drone is easy) determining a meaningful threshold

¹Aalborg University, Department of Electronic Systems, Denmark

Corresponding author:

Anders la Cour-Harbo, Aalborg University, Fredrik Bajers Vej 7C, 9220 Aalborg East, Denmark

Email: alc@es.aau.dk

value is perhaps not so easy. From a safety point-of-view the threshold should be sufficiently low to reduce the probability of fatalities to almost zero. But the large variety of drone designs will then inevitably lead to a fairly or even very conservative limit for a significant part of the drone types. However, since combining only worst case scenarios will lower the limit to the point where it is no longer useful this work will instead propose a mass threshold based on probabilities.

Previous work

Classification

Categorization or classification of unmanned aircraft has been the subject of previous publications and is part of many, if not all, national regulations for unmanned aircraft. Indeed most such regulations categorize aircraft according to mass, for instance using 1.5 kg, 7 kg, 20 lbs, 20 kg, 55 lbs, 25 kg as thresholds. A harmless drone would normally be (at least) in the lowest mass class, but given that the threshold for this class varies by two orders of magnitude between classification schemes (see below) it is also evident that a 'smallest' class does not automatically imply any reasonable interpretation of 'harmless'.

National regulation classifications Most national regulations invoke mass classifications in order to have different regulatory requirements applied to different size drones. Some national regulations have several classes while others have few. Australian regulation [Government of Australia \(2016a\)](#) and [Government of Australia \(2016b\)](#) classifies 'very small RPA' to be drones between 100 g and 2 kg and 'micro RPA' to be drones less than 100 g. The class 'micro UAV'/'micro RPA' has existed in Australia since 1998 and drones in this class is largely exempted from regulation that governs larger drones. The author has been unable to determine the origin of the 100 g and 2 kg limit. United Kingdom [Safety and Airspace Regulation Group Unmanned \(2015\)](#) has 'Small Unmanned Aircraft' at less than 20 kg (the reasoning for this threshold is 'historic developments in manned aviation') as well as a 'UAS Operating Safety Case' class at less than 7 kg. France [ministre de l'écologie du développement durable et de l'énergie \(2015\)](#) has 'D category' at less than 2 kg. Denmark [Ministry of Transport and Building \(2016\)](#) and Sweden [Transportstyrelsen \(2009\)](#) both have 'category 1A' at less than 1.5 kg (with the additional Swedish requirement of less than 150 J). New Zealand [Civil Aviation Authority of New Zealand \(2015a,b,c,d\)](#) has 'Small unmanned aircraft' at less than 25 kg (plus an unnamed class up to 15 kg). Canada [Transport Canada \(2012\)](#) has an unmanned aircraft class for less than 25 kg (as well as a 'model aircraft' class of less than 35 kg) with exemption for less than 2 kg. Canadian authorities are considering using the same threshold for a 'very small UAS' class, which alternatively may be based on surface energy density at (proposed) less than 12 J/cm² [Transport Canada \(2015\)](#); this threshold is equal to the proposed 'Micro UAS' class in [Fraser and Donnithorne-Tait \(2011\)](#) (also of Canadian origin). Switzerland [Das Eidgenössische Departement für Umwelt Verkehr Energie und Kommunikation \(2015\)](#) has a class of less than 30 kg (with limited liability insurance

requirements for less than 500 g). NASA [Maddalon et al. \(2013\)](#) has 'category I' at less than 25 kg (and less than 36 m/s).

Additional classifications US Department of Defense [U.S. Army UAS Center of Excellence \(2010\)](#) uses 'small' for drones at less than 25 kg and refers to approximately 1 lb as 'micro'. UK Ministry of Defense [Ministry of Defence \(2010\)](#) uses 'micro' for less than 2 kg. The UVSI Yearbook [UVS International \(2009\)](#) had 'micro' (less than 5 kg) as the smallest class until 2008, where 'nano' class was introduced with a threshold at 250 g. The yearbook does not offer an explanation for this choice of threshold. In [Lacher and Maroney \(2012\)](#) 'very small UAS' is listed as less than 1.5 lb. In [Weibel and Hansman \(2004\)](#) the micro class is 'less than 1 lb' and in [Weibel and Hansman \(2005\)](#) 'less than 2 lb'. In [Watts et al. \(2012\)](#) 'small UAS' means 'typically 2-5kg', while micro is taken to mean 'size [that fits] individual soldiers backpacks'. The Micro Unmanned Aircraft Systems Aviation Rulemaking Committee [Micro Unmanned Aircraft Systems Aviation Rulemaking Committee \(2016\)](#) defines a 'Category 1' of less than 250 gram and a category 2 of 'a maximum risk impact threshold of a 1% chance of AIS level 3 or greater injury, based on kinetic energy transfer at impact.' The committee will allow aircraft in category 1 to conduct 'operations over people' solely based on mass. The threshold originates in [Unmanned Aircraft Systems Recommendations Registration Task Force Aviation Rulemaking Committee \(2015\)](#), which stresses that this 'weight threshold [is] for registration purposes only', and thus does not (necessarily) constitute a 'harmless' threshold. The task force arrived at 250 gram through a fairly simple computation that assumes a very low person density on the ground, a rather high drone reliability, and a high impact velocity (based on free fall rather than propelled flight) and consequently a (compared to the present study) somewhat higher probability of fatality upon impact. [Weibel and Hansman \(2005\)](#) calculates that an 'MTBF [mean time between failure] of 100-10,000 hours' will result in a fatality rate of at most 10⁻⁷ per hour for flights anywhere in the US. This is based on a single formula using MTBF, population density, and an example drone of 63 g with a front area of 241 cm² and shelter penetration probability of 5%. In [Fraser and Donnithorne-Tait \(2011\)](#) a class called 'Harmless UAS' is suggested for drones of less than 80 gram. This is partly based on assumptions equivalent to a kinetic impact energy of 33.9 J. The threshold is derived from an extrapolation of data from drones in the mass span 0.5 to 1000+ kg, that is, the aircraft used to derive the harmless threshold is one to five orders of magnitude heavier than the threshold. [Fraser and Donnithorne-Tait \(2011\)](#) does also states that no formal study exist to determine an appropriate threshold for the 'nuisance class' and that it is 'unclear whether 200 g or even 500 g are necessarily more dangerous [than 80 g]'.

Ground casualty risk

As a small drone by definition is not carrying any people any human injury associated with a drone crash must necessarily be humans at the location where the drone impacts the ground (or grounded objects). Consequently, the probability of fatalities is closely related to probability of impacting

persons. This probability has two main components; density of people at the crash site and probability of the drone to impact one or more persons in a more or less harmful way. The former probability can generally be determined fairly accurately for a given geographical area where the people density is known and fairly homogenous [Range Safety Group Risk Committee \(2007\)](#); [Wu and Clothier \(2012\)](#). The latter probability has been subject of some research. In [King et al. \(2005\)](#) the probability of impacting people is investigated using a falling debris model and in [Cole et al. \(1997\)](#) different body parts and different body postures are considered along with different debris impact angles using the BC criterion.

Drone reliability

Reliability is the probability of a drone to behave according to specifications. This parameter is a vital component in a risk analysis since it describes how much the drone can be trusted, on average, to not experience malfunctions that may create hazardous situations. Reliability can be quantified by as little as a single figure for the entire system to a detailed description of individual component reliability and their inter-dependence. Being a fairly recent technology the empirical information on reliability of smaller civilian drones is somewhat limited, so a quantification of reliability for such drones must to a large extent rely on component analysis. This can be done with methods such as fault tree analysis (FTA), failure modes and effects analysis (FMEA), or functional hazard assessment. Often, such methods require information on component reliability which typically is not available for smaller hobby grade drones, where the components never have been subjected to a rigorous reliability study.

There does exist some literature on various approaches to quantify reliability of smaller civilian drones. Considerations on what would constitute a sufficiently reliable delivery drone are presented in [Schenkelberg \(2016\)](#). A group of students [Reimann et al. \(2014\)](#) has conducted a reasonably detailed investigation into the reliability of a specific small RC model aircraft, an Ultra Stick 120, a 4-5 kg aircraft, concluding a MTBF around 50 flight hours. And in [Venkataraman et al. \(2015\)](#) using the same aircraft stuck actuators are investigated both in terms of consequence and probability. Actuation failure modes are investigated in [Freeman and Balas \(2014\)](#) using FMEA (also using the Ultra Stick 120 at 7.4 kg).

Human injury

Drone inflicted injuries [Laback et al. \(2013\)](#) provide examples of the severity of close encounters with RC model planes, in particular larger models. The exemplified injuries are largely associated with ground handling rather than impact during flight. A study on the effect of helicopter toy drone blades on human eyeballs [Alphonse et al. \(2012\)](#) found that at least for smaller blades the effect is negligible. Five models with tip speeds up to 25 m/s were tested and apart from corneal abrasions, no injuries were observed. For medium sized helicopters (65 cm rotor diameter) the eye injury resulting from impact with a dislodged rotorblade at full speed can cause full rupture of the eye ball resulting in immediate and permanent loss of sight [Lee et al. \(2009\)](#).

A study with an airworthiness certification perspective [Magister \(2010\)](#) looks at less than 15 kg aircraft, and applies the empirically based blunt (ballistic impact) criteria (BC) from [Bir and Viano \(2004\)](#) to relate aircraft mass to injury severity. BC is basically kinetic energy relative to impact area, mass of impact object and thickness of the body wall of the target. [Radi \(2013\)](#) develops a model based on the BC to predict severity of blunt drone impacts, and based on this makes some recommendations on drone design as well as concluding that 400 g at 15 m/s (40 J) is the limit for 'severe injuries'. According to [Burke \(2010\)](#) a mass threshold of 2 lb and kinetic energy threshold of 66 J 'can be considered nonlethal'. This is based primarily on [Range Commanders Council \(2001\)](#) and [Lyo et al. \(1999\)](#).

Drone-like injuries Injuries resulting from impacts with smaller objects have been analyzed and studied for decades. This includes bullets from smaller weapons, fragments from explosions [Feinstein et al. \(1968\)](#); [Henderson \(2010\)](#), debris from accidents [Cole et al. \(1997\)](#); [Longinow et al. \(1976\)](#); [Robinson et al. \(2013\)](#), less-lethal projectiles [Widder et al. \(1998\)](#); [Lyo et al. \(1999\)](#); [Bir \(2000\)](#); [Bir and Viano \(2004\)](#); [Koene and Papy \(2011\)](#), melee weapons, both sharp and blunt, behind armor trauma [Bass et al. \(2006\)](#), and impact injuries in baseball, hockey, lacrosse [Maron et al. \(1995\)](#). A good overview of the biomechanics of chest and abdomen impacts is [Viano and King \(2008\)](#).

A few relevant key points arise from the body of research into impact-related human injuries. In relation to the challenge at hand perhaps the most important observation is that mass and kinetic energy are generally poor indicators of injury severity, that the human body reacts differently depending on the impacted body part, and that injuries only relate to the kinetic energy dissipated in the body, not the kinetic energy of the impacting object. A number of more accurate and empirically verified models have been developed. One model that fits well to a drone (chest) impact scenario is [Viano and Lau \(1988\)](#) which uses a lumped-mass thoracic model to develop a VC parameter, where V is thorax compression velocity and C is compression relative to chest depth. The VC parameter for a given impact maps well to injury severity. Another model is the blunt criterion (BC) [Clare et al. \(1975\)](#) defined as

$$BC = \ln \frac{E}{W^{1/3}TD}, \quad (1)$$

where E is kinetic energy, W is mass of impacted object, T is thickness of the body wall, and D is diameter of impacting object. The BC value maps directly to injury severity [Bir and Viano \(2004\)](#). An adaption of BC to impacts of drones is done in [Radi \(2013\)](#), where a generic drone design is used to develop formulas specifically for thorax and head impacts.

Present work

This work focuses on identifying an actual probability of a drone being harmful to humans given the mass and with all other parameters being equal. The probability model for fatalities is a combination of probabilities for the events leading to an injury and the injury mechanics. Each of these probabilities are extracted from a variety of sources and combine with a short survey of very small drones (to

determine typical mass and speed relations). The novelty in this work is determining an actual mass threshold that with the present body of scientific work available can with reasonable confidence be labelled 'harmless'. Although a number of sources report different thresholds in 2 or 3 digit grams, and some indeed recommends 250 gram, it is mostly either peripheral results from a study of larger drones, or relatively simple computations that does not account for the particulars of very small drones.

Regulatory application

During the early phases of the preparation for the now present law on drones in Denmark the Danish Transport and Construction Agency (DTCA) wanted to include the 'harmless' category with the expressed intend to relax the regulatory constraints to allow toy drones to be used similar to other toys (i.e. no need for registration, education, and other such measures) as well as allow very small commercial drones to operate more freely. Since a large part of the target audience for such a category is people without any training or relation to aviation the threshold must be very easy to understand and to check. So despite the scientific arguments against a mass-based threshold and the 'worst case' arguments against any specific threshold the DTCA embraces it as a pragmatic solution to a challenging problem. Existing national regulations (and the associated guidelines) in some other nations indicate at least implicitly that this view is shared by a number of national aviation authorities.

For Denmark the harmless threshold was first officially endorsed in a report published by DTCA in March 2015 [Trafikstyrelsen \(2015\)](#) to outline future Danish regulation. It specifically recommends 250 gram as a 'harmless threshold' (page 8, recommendation 'a') based on the research presented here. This has been carried through to bill L132 [Danish Parliament \(2016\)](#) (a revision of Danish aviation regulation to accommodate professional operations of drones) where the option for a harmless mass threshold is included in section 126b subsection 4. The threshold did not carry through to the final Act due to privacy concerns, but there is an option for the threshold to be reinstated later through ministerial decree.

In a technical opinion from EASA ([European Aviation Safety Agency 2015](#), p. 19) (a precursor to actual European regulation) a 'harmless' subcategory is proposed, due to numerous requests from the drone community, as Proposal 11 to accommodate 'toy aircraft or nano drones that cannot cause serious injuries or significant damage', and with a reference to a preprint of this work 250 gram is listed as a suitable limit.

The 'Drone Collision' Task Force under EASA in its final report [European Aviation Safety Agency \(2016\)](#) adapts a 250 gram threshold for their smallest category, stating that "A [midair] collision with the smallest drone category [harmless] is expected to be harmless, [...], at least for large aeroplane product types." A preprint of this work is listed as reference in this report.

Methods

This section is divided into four parts. The first part is the two subsection presenting the basic and simplifying assumptions

used to determine the threshold. The second part presents the probabilistic methods used. The third part explains the relation between kinetic energy and human injury, and how to find an appropriate kinetic energy threshold. Finally, the fourth part is on establishing the mass threshold from a kinetic energy threshold.

Basic assumptions

The development of a mass threshold will be based on a number of assumptions, divided into two categories. The basic assumptions which in some sense are circumstantial to the investigation, and the simplifying assumptions described in the next sections. The basic assumptions are listed here and are unchanged throughout this work. They serve to frame the problem and described the circumstances under which the threshold is meant to have effect.

Upper limit: It is assumed that the mass threshold is at most 500 gram, and as such the list of drones forming the basis of the statistical analysis will exclude any drones above 500 gram maximum take-off mass (MTOM).

Indirect injury: The probability of a fatality P_{fatality} is solely based on impact between a drone and a human being. Injuries resulting from incidents caused by a person's lack of attention for their own well-being when observing a drone are not included. Injuries resulting from subsequent actions following a drone incident (for instance a drone breaking a window and glass falling down) are also not included.

Air-to-air collisions: As a consequence of the above assumption mid-air collisions are not considered.

Awareness: It is assumed that people are not aware of the presence of a drone. It is not assumed that people will attempting to avoid a drone coming at them, or attempt to take cover.

Multiple person injury: It is assume that a drone is not large enough to injure multiple people simultaneously, or to impact an obstacle and a person simultaneously. That is, it is assumed that any energy dissipated at impact goes into one human.

Shelter: It is assumed that people are not sheltered in any form, neither by walls, fences, or even clothes.

Body regions: It is assumed that a person is impacted either in the head, thorax, or abdomen. These are typically the exposed body parts in most posture, and injury to arms and legs are typically not fatal.

Fatal injuries: Only fatalities are considered. That is, non-fatal injuries, including bleeding, pain, disabling injuries and similar are not considered.

Simplifying assumptions

To be able to quantify the probability of fatal injuries we will make a number of simplifying assumptions. In future work these might be detailed, replaced, or altogether removed to achieve a more accurate quantification.

Kinetic energy: It is assumed that kinetic energy of a drone is reasonable measure for person injury upon impact. This is a key assumption which will help introduce the mass threshold. However, it is not difficult to realize that this is a severely simplifying assumption, and future work might very well focus on removing/replacing this.

Deformation: The drone is assumed to be completely rigid and not deform upon impact. All deformation occurs in the tissue, and as such the dissipation of energy is in the person only.

Propellers and rotor: While most drones are equipped with exposed rotating propeller(s) or rotor(s) we will assume that they do not constitute a lethal threat nor contribute to the injury.

Speed: A drone can either impact through flight speed or through ballistic speed. The latter typically occurs for rotary winged drones when propulsion is lost and it moves solely through the influence of gravity and wind. While a falling drone might attain high speed, in this work the assumption is that impact occurs at the top flight speed of the drone.

Probability of lethal incidents

The ultimate goal is to determine a mass such that it is improbable for a drone below this mass to inflict fatal injuries to any person under any circumstance. Obviously it is not possible (on the long term) to completely avoid fatalities, and it would therefore be reasonable to accept a fatality rate in the same order of magnitude as manned aviation. This is a widely accepted concept termed equivalent level of safety [Haddon \(2009\)](#); [King et al. \(2005\)](#); [International Civil Aviation Organization \(2011\)](#).

Different sources report different fatality rates for manned aviation, but they general range from 10^{-7} to 10^{-8} fatalities per flight hour [Clothier and Walker \(2013\)](#); [Weibel and Hansman \(2004\)](#). Some figures are based on statistics from actual incidents, others on recommendations for manned as well as unmanned aviation. In [Range Commanders Council \(2001\)](#) 10^{-6} is specifically given as acceptable threshold, stating that 'casualty expectation must be less than one casualty in a million flight hours'. There is no significant difference between the ground fatality rates and the mid-air collision fatality rates. In this work we will assume that 10^{-7} fatalities per flight hour is acceptable.

The probability can be quantified as a product of a series of probabilities

$$P_{\text{fatality}} = P_{\text{crashing}} \times P_{\text{impact}} \times P_{\text{fatal injury}}, \quad (2)$$

where P_{crashing} is the probability of the drone crashing at (near) top speed, P_{impact} is the conditional probability of hitting a person in the crash, and $P_{\text{fatal injury}}$ is the conditional probability that an impact results in fatal injury. Per tradition in aviation P_{crashing} , and thus also P_{fatality} has the unit 'per flight hour'. As argued above by adjusting the drone mass the combined probability can be reduced, and the challenge is therefore to find the mass such that P_{fatality} is comparable to manned aviation. However, all

three probabilities are difficult to determine and obviously highly situation-specific.

In order to quantify these probabilities with reference to existing literature it is useful to further divide them

$$P_{\text{crashing}} = P_{\text{error}} \times P_{\text{loss of control}} \times P_{\text{high speed}} \quad (3)$$

$$P_{\text{impact}} = \rho_{\text{people}} \times A_{\text{person}} \quad (4)$$

$$P_{\text{fatal injury}} = P_{\text{injury}} \times P_{\text{injury fatal}} \quad (5)$$

where the individual factors express various parameters of the flight. Each of the factors are described in a little more detail in [Table 1](#). This work will focus primarily on P_{injury} and $P_{\text{injury fatal}}$ because these are the parameters mostly affect by a varying mass. The probabilities in (3) and (4) will not be investigated in depth in this work, and will all be assumed to be rather high. For any reader supplying their own probabilities a number of scenarios are presented in the results section where these probabilities can easily be replaced to determine different fatality rates.

Injury mechanics

The following is a paraphrased and 'drone-adapted' description from [Cooper and Maynard \(1989\)](#) of mechanics of person injury for a non-penetrating impact: A rapid inward displacement is the primary mechanical response of the body wall to the loading of an impacting drone and this is the principal factor responsible for the transfer of energy into the body and the production of internal injury. The maximum displacement produced and the velocity attained in the early stages of the motion are the primary parameters for the extend of the injury. Subsequent to impact and the following rapid deformation of the body wall the drone will have negligible rebound velocity and the body wall returns only very slowly to its original shape. The drone simply distorts the body wall and falls down. That is, the thoracic or abdominal wall is not acting like a spring being compressed and then releasing the kinetic energy back to the drone. The lack of significant rebound velocity shows that the body is highly damped or 'viscous'. This is a significant observation in that for a system having an elastic and viscous behavior (viscoelastic), the displacement upon impact loading is velocity dependent. The faster that a viscoelastic material is deformed, the more resistance it offers (it becomes stiffer). This behavior is broadly similar to that of a car suspension; a slow push will depress the suspension but the shock absorber stiffens the suspension to severe blows during driving. Thus, the type and severity of internal injury is dependant not only upon the magnitude of the distortion of the body wall, but also upon the velocity at which distortion occurs.

Importance of drone design The human torso can withstand rather severe compressions without sustaining significant injury. In fact, as much as 50% reduction in body dimensions can be sustained in the direction of the applied force, provided that the peak velocity of the distortion occurs at least 50 milliseconds after impact. Conversely, high velocity distortions occurring at least ten times faster can produce severe internal injury even with body wall distortions of only 3-4 cm [Cooper and Maynard \(1986\)](#). This means that temporal extension of the impact

Table 1. Short description of the factors in the probability equations, and the ranges used in this work.

| Factor | Description | Range |
|------------------------------|--|------------------|
| P_{error} | The probability of an error, either piloting error or technical malfunction. We will assume this to be fairly high for the smaller drones, and decrease with increasing size. The unit for this value is 'per hour'. | 0.5 – 10 |
| $P_{\text{loss of control}}$ | The probability that the error leads to permanent loss of control of the drone. Piloting error often causes temporary loss of control, while technical errors, such as empty battery or loss of communication typically lead to permanent loss of control. In this work we will assume a fixed value of 50%. | 0.5 |
| $P_{\text{high speed}}$ | The probability that loss of control leads to the drone traveling at near top speed. This includes free fall from higher altitudes as a consequence of loss of power, while loss of communication typically does not result in high speed crash. For this work we will assume a rather high probability of 50%. | 0.5 |
| ρ_{people} | Whether a crashing drone will impact a person depends hugely on the person density in the vicinity of the drone. This is the probability that can be regulated by requiring drones to fly some distance from roads, buildings, crowds, etc. The density can range from vanishing to about 4 persons/m ² (large crowds at public events Oberhagemann (2012)). For this work we will assume a fairly high density of 1 person per 10 m ² given that we focus on smaller drones that often are used close to other people. Note that compared to other studies such as Unmanned Aircraft Systems Recommendations Registration Task Force Aviation Rulemaking Committee (2015) this is a very high density. | 0.1 |
| A_{person} | The average size of a person and the drone combined, as seen from above. For predominantly horizontal impact trajectories the value might increase, but only slightly, since we assume impact in either head, thorax, or abdomen. | 0.25 – 0.6 |
| P_{injury} | The probability that a drone impacting a person actually causes an injury, which in this context is equal to the probability that a drones below the mass threshold will still exceed the kinetic energy threshold. This value varies greatly as a function of mass, but will always be below 1. | < 1 |
| $P_{\text{fatal injury}}$ | The probability that an injury result in a fatality. This depends on the properties of the impact object, the person being impacted (adult or child, heavy or lightly clothed etc), posture of the person (stand, sitting, crouching, etc), impact point on the body (i.e. chest is much worse than shoulders). This probability is derived from previous works in the field of medicine, and is an average over a variety of non-sheltered persons in various postures. | 10 ⁻³ |

is very important, and that prolonging the period of energy dissipation can greatly reduce the severity of the injury. Therefore, if a drone is designed in such way that it takes a long time (i.e. more than 50 ms) for the impact to peak, typically by having a compressible front area, it can be acceptable from a safety perspective to allow much higher kinetic energy than for a completely rigid construction that resembles a bullet when impacting.

Non-penetrating drones The injuries sustained by the human body are rather different for skin penetration and for crushing (non-penetrating) impacts. Skin penetration typically occurs with high kinetic energy density (high energy on a small impacting area), and in this work we will assume that the drones are designed such that the kinetic energy density is sufficiently low so that penetration will not occur. However, this is not always the case, for instance if a carbon fiber frame from a multicopter impacts a person in the head where the skin is thin and there is no deformation of underlying tissue. It should be noted that the resulting bleeding is rarely in itself lethal.

Kinetic energy threshold

The injury mechanics described above suggests that deformation velocity of the tissue is the primary factor in the severity of an impact injury. But the fact that this velocity depends on properties of the impacting object as well as the

impacted region on a human it difficult to suggest a single-parameter threshold. However, some methods do exist that can be used to estimate $P_{\text{injury fatal}}$. There are numerous articles and reports that have investigated the fatality rate for various types of impacts where kinetic energy is the primary factor, and in this work we will primarily draw on the following three methods to recommend an appropriate kinetic energy threshold.

Debris impact criterion In [Range Safety Group Risk Committee \(2007\)](#) it is concluded that a 25 ft-lb (33.9 J) threshold is applicable for avoiding fatal injuries (AIS level 4, Abbreviated Injury Scale [AAAM \(2005\)](#)) from debris impacts. This is in turn derived from lethality curves by body parts presented in [Feinstein et al. \(1968\)](#). To avoid serious injuries (AIS level 3) altogether a 11 ft-lb (14.9 J) threshold is recommended. This lower threshold for determining injuries from falling and explosion debris is also found in the FAA Flight Safety Analysis Handbook [Federal Aviation Administration \(2011\)](#). These two thresholds are to be interpreted as 1 percent threshold meaning that the probability of sustaining a AIS level 3/level 4 injury is 1%. The AIS level 3 and 4 injuries have in themselves a 10% and (up to) 50% probability of being fatal, respectively [Bir \(2000\)](#).

VC criterion The VC value can be determined a given kinetic energy and given velocity [Viano and Lau \(1988\)](#).

Assuming a thorax impact and that all kinetic energy E is absorbed in the thorax we have that

$$E = cvd = \frac{1}{2}mv^2 \quad \Leftrightarrow \quad d = \frac{mv}{2c}, \quad (6)$$

where c is a dashpot parameter in the range of 500 N/(m/s), v is impact velocity, d is displacement of impacted chest area, and m is mass of impacting object. Assuming further that the acceleration a of the impacting object (and thus the chest) is constant from initial velocity v_i to zero velocity, we find that

$$\begin{aligned} VC_{\max} &= \max_{t>0} v(t)C(t) \\ &= \max_{t>0} v(t) \int_0^t v(\tau)d\tau \\ &= \max_{t>0} (v_i + at) \left(\frac{1}{2}at^2 + v_it \right) \\ &= -\frac{3 - \sqrt{3}}{3} \frac{v_i}{a} \approx 0.42 \frac{v_i}{-a}. \end{aligned}$$

Thus, maximum VC occurs after 42% of the total impact event time, at which point $v(t) = 0.58v_i$ and $d(t) = 0.51d_{\max}$. From (6) we now have

$$VC_{\max} = 0.58v_i \cdot 0.51d_{\max} = 0.3 \frac{mv_i^2}{2cD} = \frac{0.3E}{cD}, \quad (7)$$

where D is the chest depth (normalizing factor to obtain C).

BC criterion The kinetic energy required for a given BC value can be determine from (1). According to [Sturdivan et al. \(2004\)](#) $T = kW^{1/3}$ with $k = 0.6$ for females and $k = 0.7$ for males, so

$$E = kW^{2/3}D \exp BC,$$

and from the mapping $AIS = 1.33 \cdot BC + 0.6$ given by [Bir and Viano \(2004\)](#) it is possible to map directly from AIS level to kinetic energy, as

$$E = kW^{2/3}D \exp\left(\frac{AIS - 0.6}{1.33}\right). \quad (8)$$

Data set

In this work the data set is a series of toy drone randomly selected from a number of vendor web sites. Only drones below 500 g have been included, and even very small drones are part of the set. Unlike the larger drones it is sometimes difficult to find mass (except if you actually acquire and weigh the drone), and it is often difficult to find the top speed. The drones used here all have their mass listed among the specs. Only in a few cases is the top speed listed, and it is therefore estimated based on a variety of factors, primarily commercial video of the drone in flight and the author's first hand experience with similar drones. It is noteworthy that small drones built for high speed flight do exist, and they can reach fairly high top speeds. Such specialized drones have been excluded from this analysis since they do not represent the majority of toy drones.

It would be preferable to use a data set that represents well the range of toy drones being sold, but such data is not readily available for the very small drones. However, if such a data set should be available is it relatively easy to substitute this into the model to produce more accurate predictions.

Table 2. List of 41 drones used as data set. The names are as found on vendor website at the time of compiling the list.

| Name | Type | Mass | Speed |
|-------------------------|------------|------|-------|
| Parrot Bebop 2 | Quadrotor | 500 | 15 |
| Parrot AR.Drone 2.0 | Quadrotor | 420 | 12 |
| Parrot AR.Drone 2.0 | Quadrotor | 380 | 13 |
| Lynxmotion Hunter 500 | Quadrotor | 365 | 13 |
| E-Flite Blade CX 2 | Coaxial | 227 | 7 |
| X25S Shuttle FPV Racing | Quadrotor | 198 | 14 |
| Hubsan FPV Spy Hawk | Fixed wing | 180 | 12 |
| Pantonma | Quadrotor | 135 | 11 |
| CX-33W WiFi FPV | Quadrotor | 133 | 9 |
| iPhone Flying Bomber | Coaxial | 106 | 5 |
| Syma DRO | Quadrotor | 100 | 8 |
| Raider XL | Quadrotor | 100 | 9 |
| Latrax Alias | Quadrotor | 100 | 7 |
| BLADE 180 QX HD RTF | Quadrotor | 95 | 5 |
| E-Flite UMX Pitts S-1S | Fixed wing | 90 | 9 |
| E-Flite UMX Carbon Cub | Fixed wing | 90 | 6 |
| Silverlit Space Nova | UFO single | 80 | 4 |
| E-Flite UMX Habu 180 | Fixed wing | 76 | 9 |
| Parrot Swing | Transition | 75 | 5 |
| E-Flite UMX Beast 3D | Fixed wing | 72 | 7 |
| Parrot Mambo | Quadrotor | 65 | 8 |
| Hubsan FPV X4 Plus | Quadrotor | 68 | 5 |
| Hubsan X4 Cam Plus | Quadrotor | 50 | 5 |
| FPV Drone F807 | Quadrotor | 40 | 6 |
| Hobby Zone Duet RTF | Fixed wing | 38 | 4 |
| Drone ST4 | Quadrotor | 35 | 4 |
| Traxxas QR-1 | Quadrotor | 33 | 3 |
| Hubsan X4 Pus | Quadrotor | 32 | 4 |
| Hubsan X4 H108 | Quadrotor | 31 | 4 |
| Dexterity X100 | Quadrotor | 29 | 4 |
| E-Flite Blade MCX Micro | Coaxial | 28 | 2 |
| Hubsan X4 Spider | Quadrotor | 25 | 3 |
| Crazyflie Nano | Quadrotor | 19 | 2 |
| Blade Nano QX RTF | Quadrotor | 17 | 2 |
| Nano Quad CX-10D | Quadrotor | 16 | 3 |
| FPV Drone Hawkeye | Quadrotor | 16 | 4 |
| Hubsan X4 | Quadrotor | 15 | 3 |
| Nano Quad CX-10A | Quadrotor | 15 | 2 |
| Nano Quad CX-10C | Quadrotor | 14 | 3 |
| Estes Proto X Nano | Quadrotor | 12 | 2 |
| Proto X Nano-Sized | Quadrotor | 11 | 2 |

Modelling kinetic energy to mass relation

It is clear that especially for smaller drones there is no simple relation between speed and mass, and that any function mapping between these two parameters must necessarily be rather complicated to accommodate for all the design variables, or alternatively rather imprecise as it models only the general principle of 'increasing mass results in increasing speed'. Note that such a simple model may still be quite accurate despite its imprecision. The lack of precision in a more simple model can then be capture by assuming a distribution around the model value. This is exactly what was done in [Fraser and Donnithorne-Tait \(2011\)](#) where a power model

$$v_{\max} = am^b, \quad (9)$$

with a positive power was used. For larger aircraft this seems to capture well the general relation between mass and speed, and we will assume that such a model also will be useful for the very small drones, albeit with different parameter values.

The model (9) captures the average relation between mass and speed, but does not account for the variation than drones

at similar masses will have in top speed. We expect the speed variations to grow with increasing mass and we will assume that speed is normally distributed around the mean value. A 'running' standard deviation is determined in the following way

$$\phi_n = \frac{1}{m} \sum_{n=k}^{k+m-1} \alpha_{\text{mass},n} \quad (10)$$

$$\sigma_n = \sqrt{\frac{1}{m} \sum_{n=k}^{k+m-1} (\alpha_{\text{speed},n} - a(\phi_n)^b)^2}, \quad (11)$$

where $\alpha_{\text{mass},n}$ and $\alpha_{\text{speed},n}$ are the mass and speed of drone n from the sorted data set as shown in Table 2. Approximating this (ϕ_n, σ_n) set with a first order polynomial will give a simple mass to standard deviation mapping.

Results

Kinetic energy threshold

Unfortunately, there is no simple measure for a kinetic energy threshold that can be applied directly to drones. Consequently, we adopt the approach of other works that focuses on injury from debris as well as the VC and BC criteria, and consequently use kinetic energy. Various sources report varying thresholds for injury; we decided to use some of the more well-documented sources. As a result a kinetic energy threshold at 25 J is selected, and the assumptions it that this threshold provides a $P_{\text{injury fatal}} = 10^{-3}$ probability of lethal injury.

The sources reporting the above stated thresholds focus on debris and fragments from various incidents, such as explosions and other violent occurrences. These fragments tend to be small and with high velocity (and thus having a high kinetic energy density), and the method used for deriving the thresholds would therefore tend to give a higher threshold value when applied to drones. For this work we will therefore use an intermediate kinetic energy threshold of 25 J as the 1% threshold for AIS level 3 injuries, which in turn has 10% probability of being fatal.

For a 25 J drone impact the VC criterion in (7) gives $VC_{\text{max}} = 3.75 \cdot 10^{-4}$, which is four orders of magnitude less than $VC_{\text{max}} = 1$, which is '25% probability of severe chest impact injury'. Using the BC criterion (8) for an AIS level 1 injury and assuming a 60 kg female and an impacting object with a circular impacting area of 2 cm

$$\begin{aligned} E &= kW^{2/3}D \exp\left(\frac{\text{AIS} - 0.6}{1.33}\right) \\ &= 0.6 \cdot 60^{2/3} \cdot 2 \exp\left(\frac{1 - 0.6}{1.33}\right) = 24.8, \end{aligned}$$

meaning that to sustain no more than a AIS level 1 injury equivalent to 'minor injury' and probability of death at close to 0% the body must not be exposed to more than 24.8 J.

From kinetic energy to mass

The relation between mass and kinetic energy depends on the velocity (squared), and therefore in order to establish a mass threshold it makes sense to compare the mass and velocity parameters for a series of typical drones. Only propelled

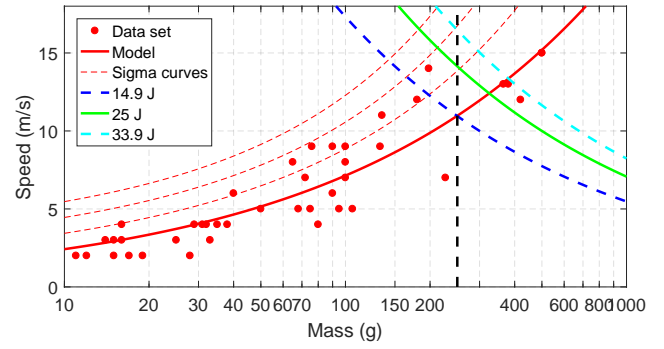


Figure 1. Mass versus top speed for the drone in the data set. The solid red curve is the power model, and the three dashed red curves are the 1σ , 2σ , and 3σ curves. The three joule curves at 14.9 J, 25 J, and 33.9 J are also shown.

top speeds are considered, and not terminal velocity of free falling drones. It is reasonable to expect that the velocity of drones in general increase with mass, i.e. larger drones tend to have higher top speeds than smaller drones. We also expect that it makes sense to talk about 'typical' drones, i.e. 10 gram drones tend to have top speeds around, say, 2 m/s, and 100 gram drones tend to have top speeds in the range 5 to 10 m/s, say. Under these two assumptions we can establish the probability that the top speed will be within certain limits for a given mass by deriving the stochastic properties of a sample set of typical drones.

The drones in the data set have been plotted in Figure 1 using a log scale on the mass axis (first axis) and a linear scale for speed. Each dot represents one drone. It is the assumption that the relation between mass (m) and propelled top speed (v_{max}) follows the power model in (9) where a and b are parameters to be determined through fitting to the data set. In Figure 1 the solid red curve shows the model as fitted to the data set using a least square metric. The fitting parameters are $a = 21.0$ and $b = 0.470$. To determine the dependency of the standard deviation on mass a 'running' standard deviation is computed using (11) with $m = 5$. The associated masses are computed with (10). A first order polynomial is fitted, giving

$$\sigma(m) = 7.8m + 0.94. \quad (12)$$

In the figure the three dashed red curves show 1, 2, and 3 times this standard deviation (1σ , 2σ , and 3σ). The 14.9 J, 25 J, and 33.9 J curves are also shown.

The probability P_{injury} that we are seeking is the probability that a drone is below the mass threshold and above the 25 J threshold. If we assume that the drones mass follows a uniform distribution on the log scale then

$$P_{\text{injury}}(\text{Threshold} = \tau) = \frac{1}{\tau} \int_0^{\tau} 1 - \text{CDF}\left(\sqrt{\frac{50}{m}}\right) dm, \quad (13)$$

where the CDF is the cumulative distribution function for the normal distribution with mean equal to the model (9) and standard deviation equal to (12). The value of this integral is shown in Figure 2. Table 3 lists P_{injury} for selected masses as determined by (13).

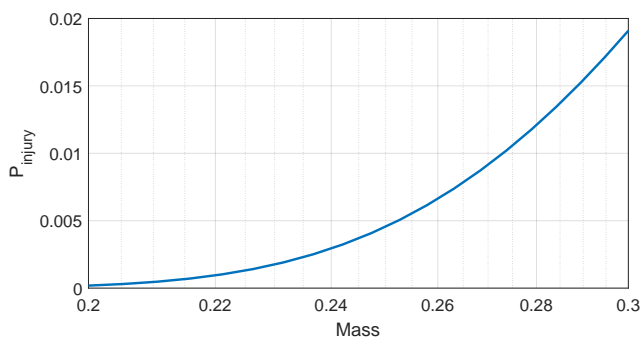


Figure 2. Probability for a drone to be below the mass threshold and above the 25 J kinetic energy threshold.

Table 3. Injury and fatal injury probabilities for selected mass thresholds.

| Threshold | P_{injury} |
|-----------|---------------------|
| 0.025 | 0 |
| 0.15 | $3.4 \cdot 10^{-8}$ |
| 0.20 | $1.8 \cdot 10^{-4}$ |
| 0.25 | $4.5 \cdot 10^{-3}$ |
| 0.30 | $1.9 \cdot 10^{-2}$ |
| 0.40 | $6.4 \cdot 10^{-2}$ |

Mass threshold

Based on the results in the previous section it is now possible to setup a number of scenarios for which the probability of a fatality can be determined. A total of 8 scenarios are presented in Table 4, each giving a value for P_{fatality} from (2). The scenarios listed all have rather conservative values for the probabilities not investigated in depth in this work. It is documented in literature that P_{error} is in the order of 10^{-2} for drones around 10 kg and given that smaller and cheaper drones are most likely somewhat less reliable the numbers used here are 2-3 orders of magnitude larger. P_{LOC} and $P_{\text{high speed}}$ are not well documented in the literature, and are consequently set rather high. Unless the drone is flying as part of an event the people in the vicinity of the flight would probably be bystanders or third persons not in anyway related to the flight. Such people would rarely be closely spaced, thus the value of 1 person per 10 square meters. The impact area of a person is for small drones almost the same as the area of the person (roughly 0.25 m^2) and growing as the drones become larger.

The values used in the scenarios may arguable be different in a lot of circumstances, and it is easy for the reader to substitute different values to accommodate other scenarios. In particular, the reliability of the drone, expressed as P_{crash} may be significantly different for professional drones, allowing for a higher mass and/or higher people density for at given P_{fatality} .

It is important to note that $P_{\text{injury fatal}} = 10^{-3}$ carries the implicit assumption that a drone with a kinetic energy higher than 25 J in fact has an energy of no more than 25 J. This means that fatality rates computed for drones with significant probability of exceeding the 25 J threshold (and thus with a significant probability of having kinetic energy at 30, 40 or even 50 J) is misleading. For the scenarios in Table 4 this is primarily a concern for the 'At 400 g' scenario, which shows a deceptively low fatality rate. For the 'At 250 g' scenario

the probability of exceeding 25 J is 14%, but drops to 2.8% for the 33.9 J threshold. So, there is about 10% probability that a 250 gram drone has kinetic energy between 25 J and 33.9 J. Since $P_{\text{injury fatal}}$ is in the order of 10^{-2} for 33.9 J the fatality can be adjusted accordingly, and becomes $20 \cdot 10^{-7}$ instead of $7 \cdot 10^{-7}$. For smaller masses this adjustment quickly vanishes, and consequently the fatality rates for the first four scenarios are much less affected.

The values in Table 4 indicates that a mass threshold of 250 gram will provide a sufficiently low fatality rate to match a 10^{-7} criterion. While a slightly higher mass would still fit the criterion it seems reasonable to also have in mind that drones close to the threshold will face the same relaxed requirements as drones well below the threshold. For drones at 250 gram the fatality rate is 20 times higher than 10^{-7} , but drops off quickly for decreasing mass. Given that most drones will be somewhat below the threshold 250 gram is recommended by this author.

Discussion and Future Work

This work recommends a mass threshold for 'harmless' drone to be 250 gram. This recommendation is based on a long series of estimates and assumptions, many of which may be altered to achieve a higher or lower threshold. Some estimates are somewhat uncertain and could benefit greatly from more in-depth investigations, and some assumptions could be argued to be either very conservative or overly optimistic as they are based on indications from other literature or extrapolated from existing data to a perhaps unreasonable extend. As such, further work might reveal a different recommendation for a mass threshold.

Uncertainties

In order to produce an actual and well-founded recommendation a number of assumptions were made and probabilities were derived based on literature rather than statistics from actual flight. This introduces some degree of uncertainty in the final result, but hopefully the probabilities throughout this work have on average been sufficiently conservative to warrant a useful result. To aid future work the following is a short discussion on some of the key questions that one could ask.

What is the reliability really of a drone? The best way to learn the reliability of a particular drone is to fly it. To achieve a reasonably good statistical basis the drone should be used in a typical context and flown for sufficiently many hours to have a statistically significant result. Even for smaller drones with a high error rate (P_{error} is expected to be high) it takes a significant number of flight hours to establish a 5% or even 1% significance level. For larger more reliable drones the flight hours needed could easily be in thousands. This is certainly not unachievable eventually (some drones have clocked 10^4 to 10^6 flight hours) and testing through flight hours is indeed part of an ongoing discussion about certification of drones. However, for most drones such flight records are still far in the future.

In this work we rely on estimates based partly on estimates for somewhat larger, though still hobby-like, drones, and partly immediately observable reliability of existing toy

Table 4. Examples of estimated probabilities for a number of scenarios. The first four are for drones with masses with uniform distribution on a log scale between 0 and the given mass, while the last four are for drones at the given mass.

| Mass gram | P_{error} Per hour | P_{LOC} | $P_{\text{high speed}}$ | ρ_{people} persons/m ² | A_{person} m ² | P_{injury} | $P_{\text{injury fatal}}$ | P_{fatality} Per hour |
|-----------|--------------------------------|------------------|-------------------------|--|---------------------------------------|------------------------|---------------------------|-----------------------------------|
| < 25 | 10 | 0.5 | 0.5 | 0.1 | 0.25 | 0 | 10 ⁻³ | 0 |
| < 150 | 2 | 0.5 | 0.5 | 0.1 | 0.25 | 3.4 · 10 ⁻⁸ | 10 ⁻³ | 4.2 · 10 ⁻¹³ |
| < 250 | 1 | 0.5 | 0.5 | 0.1 | 0.25 | 4.5 · 10 ⁻³ | 10 ⁻³ | 2.8 · 10 ⁻⁸ |
| < 400 | 1 | 0.5 | 0.5 | 0.1 | 0.4 | 6.4 · 10 ⁻² | 10 ⁻³ | 6.4 · 10 ⁻⁷ |
| At 150 | 1 | 0.5 | 0.5 | 0.1 | 0.25 | 2.4 · 10 ⁻⁶ | 10 ⁻³ | 1.5 · 10 ⁻¹¹ |
| At 200 | 1 | 0.5 | 0.5 | 0.1 | 0.25 | 8.7 · 10 ⁻³ | 10 ⁻³ | 5.4 · 10 ⁻⁸ |
| At 250 | 0.5 | 0.5 | 0.5 | 0.1 | 0.4 | 0.14 | 10 ⁻³ | 7.0 · 10 ⁻⁷ |
| At 400 | 0.5 | 0.5 | 0.5 | 0.1 | 0.6 | 0.73 | 10 ⁻³ | 5.5 · 10 ⁻⁶ |

drones. In Table 4 the smallest drones are estimated to experience an error every 6 minutes of flight. The reasoning is that such small toy drones experience both pilot errors and mechanical malfunctions all the time. For the largest drone (up to 400 gram) we expected that on average there will be an error every 1-2 flight hours. It stands to reason that the pilot only makes few mistakes (disregarding an initial learning period) with more expensive drones and that drones of that size are significantly more mechanically and electronically reliable.

How likely is it actually that a person is hit by a drone?

In this work the density of people on the ground is the only factor in the probability equation to account for the probability of impacting a person when a drone is crashing. And the probability is fixed at 2% to 6%, a fairly conservative estimate for most scenarios. This value indicates a 'loose' gathering of people without a specific event (like people in a park one a Sunday afternoon), a scenario that certainly is realistic, but also often grossly conservative. Further, one could argue that most intelligent pilots would fly their larger drones at unpopulated areas until they are relatively comfortable with its operations and reliability (after a software upgrades, for instance). However, P_{impact} is also the only factor of the three in (2) which is not in any way related to the drone itself. This makes it somewhat more difficult to control, and thus the conservatism.

On top of this the basic assumption is that people are unaware of the drone crashing, and therefore do not attempt to avert the drone using arms or legs, cover their face or chest with their arms, take a crouching or prone posture, or indeed avoid the drone altogether. For situations where only people that are directly or indirectly involved in the flight (pilot and spectators) this is rather conservative, but for situations where a broader gathering of people are present, such as a city streets and event crowds, one might expect the majority of people to be completely ignorant of the presence of the drone. In this case the person density is presumably a good measure of the impact probability.

Is the data set representative? For this work only a small sample set of drones is used, and as such the uncertainty in the joule to mass relation is relatively high. A bigger data set containing a wider variety of drones might reveal different results, and push the mass threshold either way. However, this is only true if drones with different top speed than those used are added to the data set. That is, more drones with higher top speed (relatively independent of mass) would

decrease the recommended mass threshold. That is, if smaller drones are predominant in the market, and a representative data set therefore would contain more smaller than larger drones, this would not in itself change the recommended mass threshold even though the average drone would be fairly small.

The top speed of smaller drones can be difficult to determine without actually measuring it during flight (using for instance a radar or a camera system). Some drones do have a top speed value specified, but since top speed is a relatively uninteresting property for most smaller drones, this specific value is often either missing or (probably) estimated by the manufacturer or the vendor. This work would certainly benefit from a more thorough investigation into the actual mass and top speed relation, but it is hard to do without actually acquiring a significant number of drones and conduct the necessary test flights.

What about mid-air collisions? Aviation regulation today does not permit unmanned aircraft (at least not the kind that are of interest here) to operate in non-segregated airspace. This is done by requiring drones to stay below a certain altitude limit, typically 100 m or 400 ft. While this indeed separates drones from the vast majority of manned aviation, there are still very low altitude activities such as military aircraft and search and rescue helicopters. Evidently there is a risk of mid-air collision between a drone and a manned aircraft, and there is arguably a significant probability of a fatal outcome from such a collision. However, the mass of the drone is of little significance in such accident scenarios since even the smallest drones could cause significant damage to a high speed aircraft or if ingested into a turbine engine Fraser and Donnithorne-Tait (2011); Range Safety Group Risk Committee (2007). Therefore, to avoid such accidents operational restrictions is much more effective than a mass threshold.

Alternative threshold

It is quite obvious that the shape of an impacting object is crucial, and that there is great potential for designing drones for which a threshold much higher than 25 J would be appropriate. However, rather than having a dynamic kinetic energy threshold it would probably be better to have a restriction on the 'lethality' of a drone by imposing a threshold on the deformation velocity of a human body that a given drone can inflict. While this is indeed somewhat more difficult to determine than the mass of a drone (and

certainly beyond the skills of any person acquiring a drone from a toy store for recreational purposes) it is nonetheless possibly for professional drone manufacturer to demonstrate that their particular drone design is likely to not cause tissue deformation velocities beyond a given threshold. A recommendation for such a threshold and how to stay below it is beyond the scope of this work.

Regulatory use

The 250 gram threshold is a compromise between numerous conflicting interests, and as described above not really a good measure for the lethality of a drone. But from a regulatory point-of-view such a simple and easily measurable threshold is straightforward to both implement and enforce. This means that it can be used for regulating the use of drones for the general population, without having to resort to more difficult measures such as top speed, kinetic energy, design etc. The 'harmless' category fits well into a larger framework of classifications of unmanned aircraft, where the 'harmless' category naturally will have the least restrictions, possibly even very few restrictions, to allow people to legally fly recreationally without any knowledge of aviation regulation. Numerous national aviation regulators as well as the European regulatory processes have adopted the concept of a harmless category, although the threshold for category vary greatly. A few, including Denmark and EASA, are considering the 250 gram limit as an appropriate value.

In order for the recommended threshold to apply it is important to observe the assumptions listed previously. Many of these will fit quite well with the intentions of regulatory bodies, for instance the assumption that people are not prepared for a drone impact. Other assumptions might required limitations in the permitted use of 'harmless' drones. For instance the assumption on people density in the three scenarios might lead to the requirement that a drone cannot be operated directly over crowds of people. And the assumption that the toy drones are representative for the average use, thus disregarding some small subsets of all acquirable drones (such high speed specialized drones), might lead to an additional requirement that high speed drones are exempted from the 'harmless' category.

Future work

There is a whole plethora of future work to be done within the subject of drone inflicted injuries. Numerous topics have been indicated above and it is easy to imagine several more. For this author the focus will be on a much better knowledge of the value of P_{injury} (see Table 1). To that end the author and his research team are currently constructing a catapult to conduct actual impact test with smaller drones on human body replicas (typically various pig body parts). This is done in cooperation with medically trained researchers, including forensic pathologies, to ensure proper injury evaluation.

References

AAAM (2005) Abbreviated Injury Scale (AIS) 2005 Manual. Technical report, Association for the Advancement of Automotive Medicine.

- Alphonse VD, Kemper AR, Rowson S and Duma SM (2012) Eye injury risk associated with remote control toy helicopter blades. In: *49th Annual Rocky Mountain Bioengineering Symposium & 49th International ISA Biomedical Sciences Instrumentation Symposium*. pp. 77–83.
- Bass CR, Salzar RS, Lucas SR, Davis M, Donnellan L, Folk B, Sanderson E and Waclawik S (2006) Injury risk in behind armor blunt thoracic trauma. *International journal of occupational safety and ergonomics : JOSE* 12(4): 429–442. DOI:10.1080/10803548.2006.11076702.
- Bir CA (2000) *The Evaluation of Blunt Ballistic Impacts of the Thorax*. PhD Thesis, Wayne State University.
- Bir CA and Viano DC (2004) Design and injury assessment criteria for blunt ballistic impacts. *The Journal of Trauma, Injury, Infection, and Critical Care* 57(December): 1218–1224. DOI: 10.1097/01.TA.0000114066.77967.DE.
- Burke DA (2010) *System Level Airworthiness Tool: A Comprehensive Approach to Small Unmanned Aircraft System Airworthiness*. PhD Thesis, North Carolina State University.
- Civil Aviation Authority of New Zealand (2015a) Advisory Circular AC101-1. DOI:AFS-800AC91-97.
- Civil Aviation Authority of New Zealand (2015b) Advisory Circular AC102-1. DOI:AFS-800AC91-97.
- Civil Aviation Authority of New Zealand (2015c) Gyrogliders and Parasails, Unmanned Aircraft (including Balloons), Kites, and Rockets Ū Operating Rules - Part 101.
- Civil Aviation Authority of New Zealand (2015d) Unmanned Aircraft Operator Certification - Part 102.
- Clare VR, Mickiewicz AP, Lewis JH and Sturdiven LM (1975) Blunt Trauma Data Correlation. Technical Report May, Report EB-TR-75016. Edgewood Arsenal.
- Clothier RA and Walker RA (2013) The Safety Risk Management of Unmanned Aircraft Systems. In: Valavanis KP and Vachtsevanos GJ (eds.) *Handbook of Unmanned Aerial Vehicles*. Springer Science + Business Media B.V., Dordrecht, Netherlands. ISBN 9789048197071, p. 37.
- Cole JK, Young LW and Jordan-culler T (1997) Hazards of Falling Debris to People, Aircraft, and Watercraft. Technical Report April, Sandia National Laboratories.
- Cooper GJ and Maynard R (1986) An experimental investigation of the biokinetic principles governing non-penetrating impact to the chest and the influence of the rate of body wall distortion upon the severity of lung injury. In: *International IRCOBI Conference on the Biomechanics of Impacts*. pp. 331–342.
- Cooper GJ and Taylor DEM (1989) Biophysics of Impact Injury to the Chest and Abdomen. *Journal of the Royal Army Medical Corps* 135(2): 58–67. DOI:10.1136/jramc-135-02-04.
- Danish Parliament (2016) Forslag til Lov om ændring af lov om luftfart.
- Das Eidgenössische Departement für Umwelt Verkehr Energie und Kommunikation (2015) Verordnung des UVEK über Luftfahrzeuge besonderer Kategorien.
- European Aviation Safety Agency (2015) Introduction of a regulatory framework for the operation of unmanned aircraft (Technical Opinion).
- European Aviation Safety Agency (2016) "Drone Collision" Task Force. Final Report. Technical report, European Aviation Safety Agency.

- Federal Aviation Administration (2011) Flight Safety Analysis Handbook - Version 1.0.
- Feinstein DI, Heugel W, Kardatzke M and Weinstock A (1968) Personnel Casualty Study. Technical report, IIT Research Institute, Chicago.
- Fraser CSR and Donnithorne-Tait D (2011) An Approach to the Classification of Unmanned Aircraft. In: *26th International Conference on Unmanned Air Vehicle Systems 2011*. pp. 157–211.
- Freeman P and Balas GJ (2014) Actuation failure modes and effects analysis for a small UAV. In: *2014 American Control Conference*. IEEE. ISBN 978-1-4799-3274-0, pp. 1292–1297. DOI:10.1109/ACC.2014.6859482.
- Government of Australia (2016a) Civil Aviation Legislation Amendment (Part 101) Regulation 2016 F2016L00400.
- Government of Australia (2016b) Civil Aviation Legislation Amendment (Part 101) Regulation 2016 F2016L00400: Explanatory Statement.
- Haddon D (2009) E.Y013-01 - Airworthiness Certification of Unmanned Aircraft Systems (UAS). Technical report, Rulemaking Directorate - EASA.
- Henderson J (2010) Lethality criteria for debris generated from accidental explosions. Technical report, UK Ministry of Defence.
- International Civil Aviation Organization (2011) Circular 328 - Unmanned Aircraft Systems (UAS). Technical report, International Civil Aviation Organization, Montreal.
- King DW, Bertapelle A and Moses C (2005) UAV Failure Rate Criteria for Equivalent Level of Safety. In: *International Helicopter Safety Symposium*. Montreal, p. 9.
- Koene L and Papy A (2011) Towards a better, science-based, evaluation of kinetic non-lethal weapons. *International Journal of Intelligent Defence Support Systems* 4(2): 169. DOI:10.1504/IJIDSS.2011.039548.
- Laback C, Vasilyeva A, Rappl T, Lumenta D, Giunta RE and Kamolz L (2013) Modellflug: Eine nicht zu unterschätzende Quelle für komplexe Verletzungen. *Handchirurgie Mikrochirurgie Plastische Chirurgie* 45(6): 354–7. DOI:10.1055/s-0033-1357198.
- Lacher A and Maroney D (2012) A New Paradigm for Small UAS. In: *AUVSI Unmanned Systems North America Conference*. pp. 885–898.
- Lee V, Liu D, Leung G, Luo Y and Lam P (2009) Devastating projectile injury of the eye caused by a remote-controlled toy helicopter. *Hong Kong Med J* 15(6): 492–493.
- Longinow A, Wiedermann A, Citko S and Iwankiw N (1976) DEBRIS MOTION AND INJURY RELATIONSHIPS IN ALL HAZARD ENVIRONMENTS. Technical report, Defense Civil Preparedness Agency, Washington.
- Lyo DH, Patton BJ and Bir CA (1999) Injury evaluation techniques for non-lethal kinetic energy munitions. Technical report, Army Research Laboratory, Aberdeen Proving Ground.
- Maddalon JM, Hayhurst KJ, Koppen DM, Upchurch JM and Morris AT (2013) Perspectives on Unmanned Aircraft Classification for Civil Airworthiness Standards. Technical report, NASA, Langley Research Center, Hampton, Virginia.
- Magister T (2010) The small unmanned aircraft blunt criterion based injury potential estimation. *Safety Science* 48(10): 1313–1320. DOI:10.1016/j.ssci.2010.04.012.
- Maron BJ, Poliac LC, Kaplan JA and Mueller FO (1995) Blunt Impact to the Chest Leading to Sudden Death from Cardiac Arrest during Sports Activities. *New England Journal of Medicine* 333(6): 337–342. DOI:10.1056/NEJM199508103330602. URL <http://www.nejm.org/doi/abs/10.1056/NEJM199508103330602>.
- Micro Unmanned Aircraft Systems Aviation Rulemaking Committee (2016) ARC Recommendations Final Report. Technical report.
- ministre de l'écologie du développement durable et de l'énergie L (2015) NOR: DEVA1528542A - Arrêté du 17 décembre 2015 relatif à la conception des aéronefs civils qui circulent sans personne à bord, aux conditions de leur emploi et aux capacités requises des personnes qui les utilisent.
- Ministry of Defence (2010) Joint Doctrine Note 3/10 Unmanned Aircraft Systems: Terminology, Definitions and Classification.
- Ministry of Transport and Building (2016) Bekendtgørelse om flyvning med droner i bymæssigt område - BEK nr 1119.
- Oberhagemann BD (2012) Static and Dynamic Crowd Densities at Major Public Events. Technical Report March, Technisch-Wissenschaftlicher Beirat (TWB).
- Radi A (2013) Human injury model for small unmanned aircraft impacts. Technical report, Civil Aviation Safety Authority, Australia.
- Range Commanders Council (2001) Range safety criteria for unmanned air vehicles - rationale and methodology supplement. Supplement to document 323-99. Technical report, Range Commanders Council.
- Range Safety Group Risk Committee (2007) Common Risk Criteria Standards for National Test Ranges: Supplement. Technical report, Range Commanders Council.
- Reimann S, Amos J, Bergquist E, Cole J, Phillips J and Shuster S (2014) UAV for Reliability Build. Technical report, University of Minnesota.
- Robinson C, Paramasivam E, Taylor E, Morrison A and Sanderson E (2013) Study and development of a methodology for the estimation of the risk and harm to persons from wind turbines. Technical report, Health and Safety Executive.
- Safety and Airspace Regulation Group Unmanned (2015) Unmanned Aircraft System Operations in UK Airspace - Guidance - CAP 722. 6th Edition.
- Schenkelberg F (2016) How reliable does a delivery drone have to be? In: *2016 Annual Reliability and Maintainability Symposium (RAMS)*. IEEE. ISBN 978-1-5090-0249-8, pp. 1–5. DOI:10.1109/RAMS.2016.7448054.
- Sturdivan LM, Viano DC and Champion HR (2004) Analysis of injury criteria to assess chest and abdominal injury risks in blunt and ballistic impacts. *The Journal of trauma* 56(3): 651–663. DOI:10.1097/01.TA.0000074108.36517.D4.
- Trafikstyrelsen (2015) Fremtidens regulering af civile droner - Rapport fra en tværministeriel arbejdsgruppe. Technical report, Danish Transportation Authority.
- Transport Canada (2012) UAV Systems Program Design Working Group - Phase 1 Final Report. Technical report, CARAC Activity Reporting Notice #2015-012.
- Transport Canada (2015) Notice of Proposed Amendment Unmanned Air Vehicles.
- Transportstyrelsen (2009) Transportstyrelsens föreskrifter om verksamhet med obemannade luftfartyg (UAS) (konsoliderad

- elektronisk utgåva) - TSFS 2009:88.
- Unmanned Aircraft Systems Recommendations Registration Task Force Aviation Rulemaking Committee (2015) Task Force Recommendations Final Report. Technical report.
- US Army UAS Center of Excellence (2010) Eyes of the Army - U.S. Army Roadmap for UAS 2010-2035. Technical report. DOI:ATZQ-CDI-C.
- UVS International (2009) *Unmanned Aircraft Systems - The Global Perspective 2008/2009*. Blyenburgh & Co.
- Venkataraman R, Lukátsi M, Vanek B and Seiler P (2015) Reliability Assessment of Actuator Architectures for Unmanned Aircraft. *IFAC-PapersOnLine* 48(21): 398–403. DOI:10.1016/j.ifacol.2015.09.559.
- Viano DC and King AI (2008) Biomechanics of Chest and Abdomen Impact. In: Peterson DR and Bronzino JD (eds.) *Biomechanics Principles and Applications*. CRC Press. ISBN 978-0-8493-8534-6, pp. 7.1–7.14.
- Viano DC and Lau IV (1988) A viscous tolerance criterion for soft tissue injury assessment. *Journal of Biomechanics* 21(5): 387–399. DOI:10.1016/0021-9290(88)90145-5.
- Watts AC, Ambrosia VG and Hinkley EA (2012) Unmanned aircraft systems in remote sensing and scientific research: Classification and considerations of use. *Remote Sensing* 4(6): 1671–1692. DOI:10.3390/rs4061671.
- Weibel RE and Hansman RJ (2004) Safety Considerations for Operation of Different Classes of UAVs in the NAS. In: *3rd "manned Unlimited" Technical Conference*, September. Chicago: AIAA, pp. 1–11.
- Weibel RE and Hansman RJ (2005) Safety considerations for operations of unmanned aerial vehicles in the national airspace system. Technical Report March, MIT International Center for Air Transportation.
- Widder JM, Butz DJ and Milosh JM (1998) Assessing the Blunt Trauma Potential of Free Flying Projectiles for Development and Safety Certification of Non-Lethal Kinetic Impactors.
- Wu P and Clothier R (2012) The Development of Ground Impact Models for the Analysis of the Risks Associated with Unmanned Aircraft Operations Over Inhabited Areas. In: *Proceedings of the 11th Probabilistic Safety Assessment and Management Conference (PSAM11) and the Annual European Safety and Reliability Conference (ESREL 2012)*. ISBN 9781622764365, p. 14.